


REV	DATE	DESCRIPTION	DRAWN

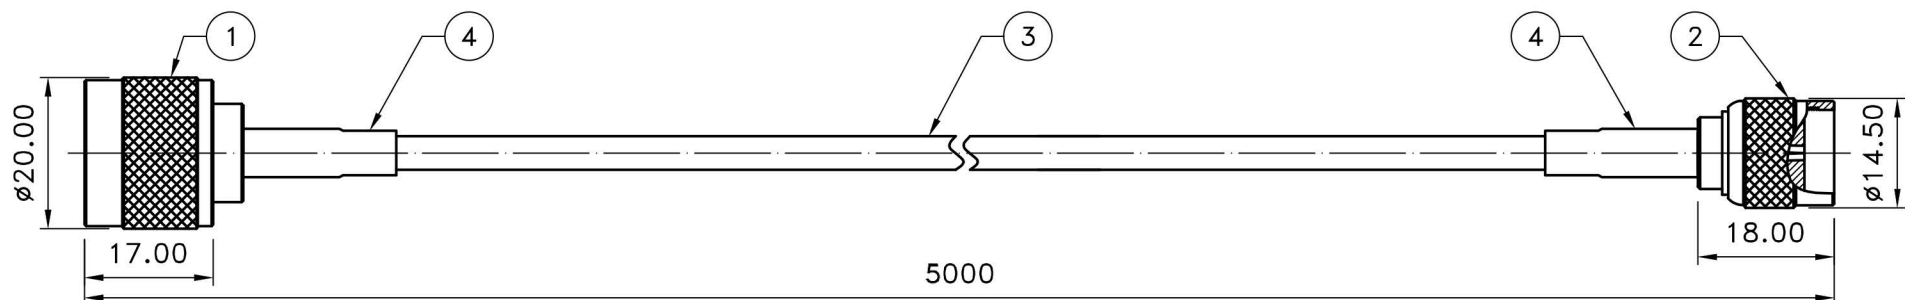

NOTE:

1.N MALE CRIMP

CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING

2.RP TNC MALE CRIMP

CENTER PIN GOLD PLATING 1.5μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING

3.LOW LOSS 200 COAXIAL CABLE/3D

ATTENUATION : 0.32dB/m@900MHz 0.42dB/m@1800MHz 0.61dB/m@3000MHz
CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
INSULATION : GAS-FPE/Ø2.95mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
JACKET : PVC/Ø4.95mm

4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	TNC-1501-4-F2-RP-TGN	BRASS	NICKEL	1
1	N-1101-4-F2-TGN	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

Prohibit re-circulating



NOTE		DIMENSION	
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.		UNLESS OTHERWISE NOTED TOLERANCES	
		0.X=±0.2	
		0.XX=±0.1	
		CABLE LENGTH:	
		L ≥10000=+50 1000≤L<10000=+30 L<1000=+8	
TITLE		DRAWING NO.	
N male to RP TNC male		np-rtncp-200-5.0	
APPROVED		DRAWN DATE	
		01/09/12	
CHECKED		SCALE	
		1:1	
DRAWN		UNIT	
ALICE		mm	