


REV	DATE	DESCRIPTION	DRAWN

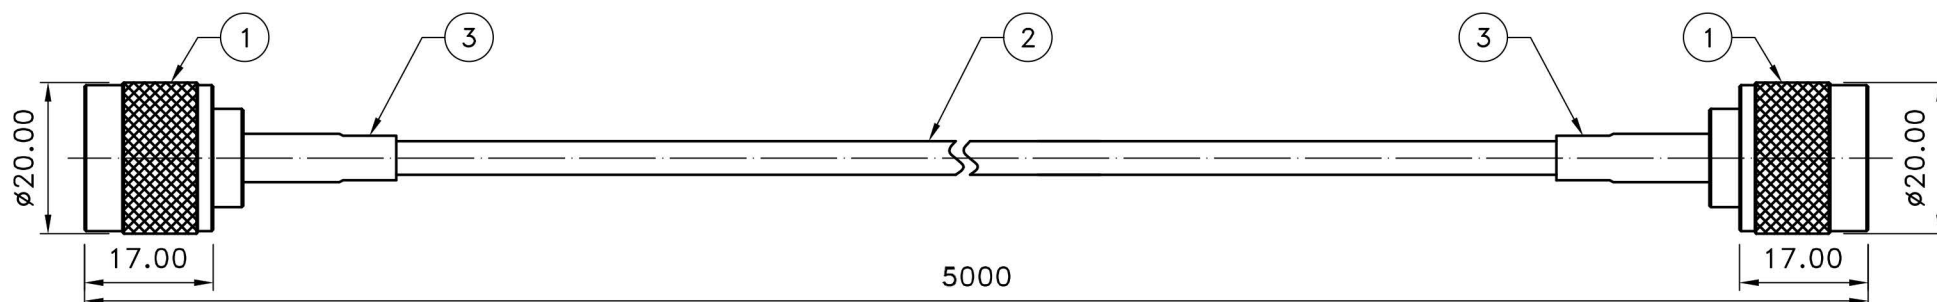

NOTE:
 1.N MALE CRIMP
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 2.LOW LOSS 200 COAXIAL CABLE/3D
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/ $\varnothing 1.12$ mm
 INSULATION : GAS-FPE/ $\varnothing 2.95$ mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/ $16*4*0.10$ mm/59% COVERAGE
 JACKET : PVC/ $\varnothing 4.95$ mm

3	D0176 (SHRINK TUBE)	PE	BLACK	2
2	LLC200	ASSY	BLACK	1
1	N-1101-4-F2-TGN	BRASS	NICKEL	2
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

Prohibit re-circulating



NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES $0.X=\pm 0.2$ $0.XX=\pm 0.1$ CABLE LENGTH: $L \geq 10000 = +_{-0}^{50}$ $1000 \leq L < 10000 = +_{-0}^{30}$ $L < 1000 = +_{-0}^8$

 WIFI-Link™ 台灣崑海尼可	
TITLE N male to N male	
DRAWING NO. np-np-200-5.0	
APPROVED	DRAWN DATE 08/12/15
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm