


REV	DATE	DESCRIPTION	DRAWN

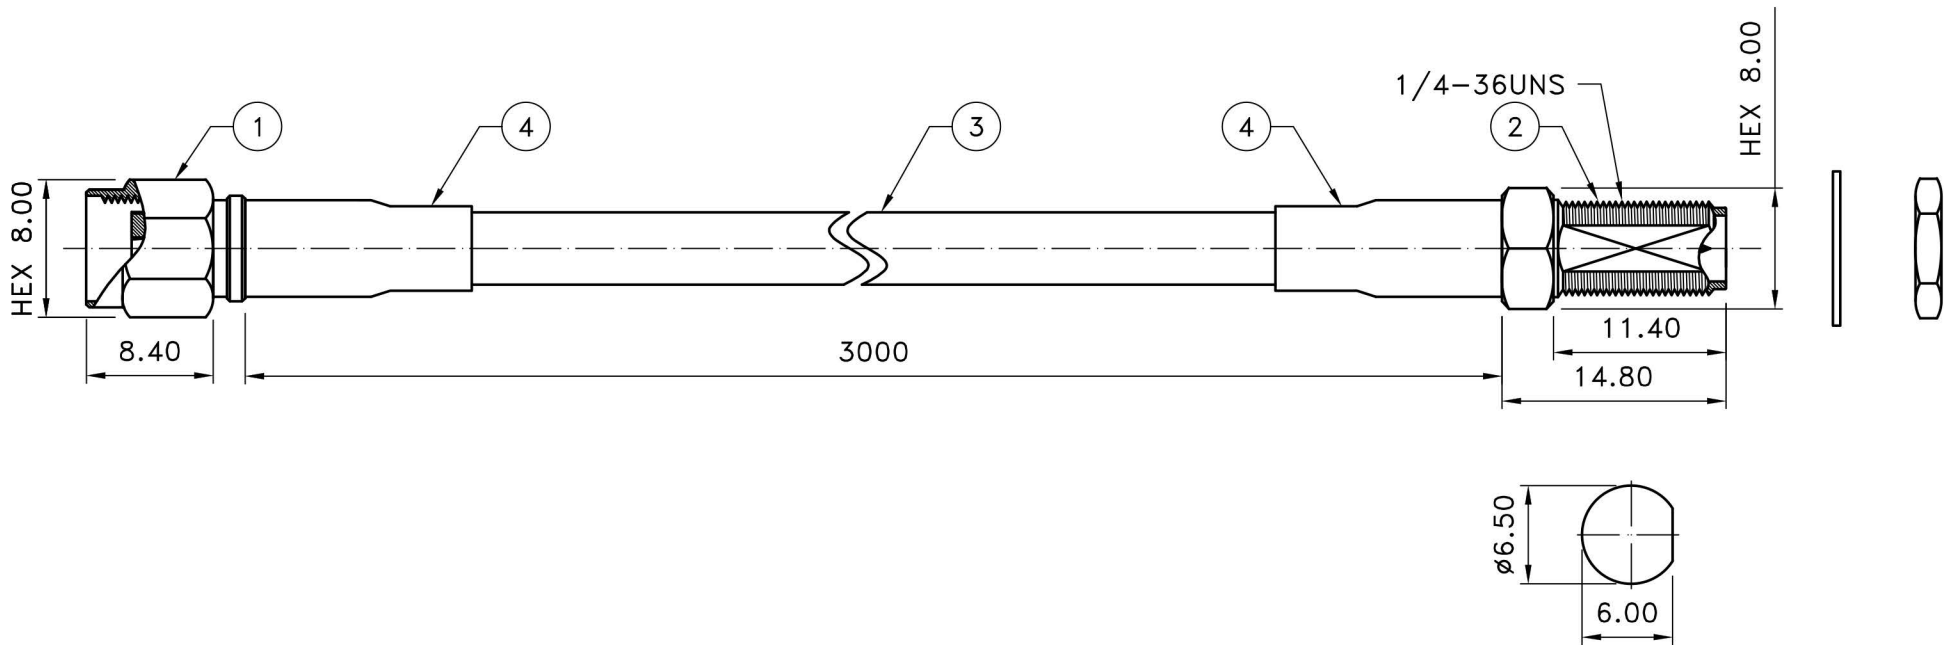

RECOMMENDED MOUNTING HOLE

- NOTE:
- RP SMA MALE CRIMP
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 - RP SMA FEMALE BULKHEAD CRIMP
 CENTER PIN GOLD PLATING 20 μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3 μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 - LOW LOSS 200A COAXIAL CABLE/3D
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
 INSULATION : GAS-FPE/Ø2.95mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
 JACKET : PVC/Ø4.95mm

Prohibit re-circulating

RoHS COMPLIANT

WIFI-Link
 台灣歲海尼可

TITLE
 RP SMA MALE-RP SMA FEMALE

DRAWING NO.
 RSMAP-RSMAJB-200-3.0

APPROVED	DRAWN DATE 06/22/17
----------	------------------------

CHECKED	SCALE 2:1
---------	--------------

DRAWN ALICE	UNIT mm
----------------	------------

NOTE	DIMENSION
1. STRIP ALL BURRS. 2. ALL DIMENSIONS ARE AFTER PLATING. 3. DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4. CHAMFER 1ST & LAST THREADS 45° 5. BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES $0.X = \pm 0.2$ $0.XX = \pm 0.1$ CABLE LENGTH: $L \geq 10000 = +0$ $1000 \leq L < 10000 = +0$ $L < 1000 = +0$

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	WL-SMA-2-BJRP200	BRASS	GOLD	1
1	WL-SMA-1-RP200	BRASS	GOLD	1